

Table 1–1. Cyclone II FPGA Family Features (Part 1 of 2)

Feature	EP2C5 (2)	EP2C8 (2)	EP2C15 (1)	EP2C20 (2)	EP2C35	EP2C50	EP2C70
LEs	4,608	8,256	14,448	18,752	33,216	50,528	68,416
M4K RAM blocks (4 Kbits plus 512 parity bits)	26	36	52	52	105	129	250
Total RAM bits	119,808	165,888	239,616	239,616	483,840	594,432	1,152,000
Embedded multipliers (3)	13	18	26	26	35	86	150
PLLs	2	2	4	4	4	4	4

VGA Signal Timings, $f = 25,175 \text{ Mhz} \Rightarrow \text{period} = 39,72 \text{ ns}$

Format	Pixel Clock (MHz)	Horizontal (in Pixels)				Vertical (in Lines)			
		Active Video	Front Porch	Sync Pulse	Back Porch	Active Video	Front Porch	Sync Pulse	Back Porch
640x480, 60Hz	25.175	640	16	96	48	480	11	2	31
640x480, 72Hz	31.500	640	24	40	128	480	9	3	28
640x480, 75Hz	31.500	640	16	96	48	480	11	2	32
640x480, 85Hz	36.000	640	32	48	112	480	1	3	25
800x600, 56Hz	38.100	800	32	128	128	600	1	4	14
800x600, 60Hz	40.000	800	40	128	88	600	1	4	23
800x600, 72Hz	50.000	800	56	120	64	600	37	6	23
800x600, 75Hz	49.500	800	16	80	160	600	1	2	21
800x600, 85Hz	56.250	800	32	64	152	600	1	3	27
1024x768, 60Hz	65.000	1024	24	136	160	768	3	6	29
1024x768, 70Hz	75.000	1024	24	136	144	768	3	6	29
1024x768, 75Hz	78.750	1024	16	96	176	768	1	3	28
1024x768, 85Hz	94.500	1024	48	96	208	768	1	3	36

Figure 2–1. Cyclone II EP2C20 Device Block Diagram

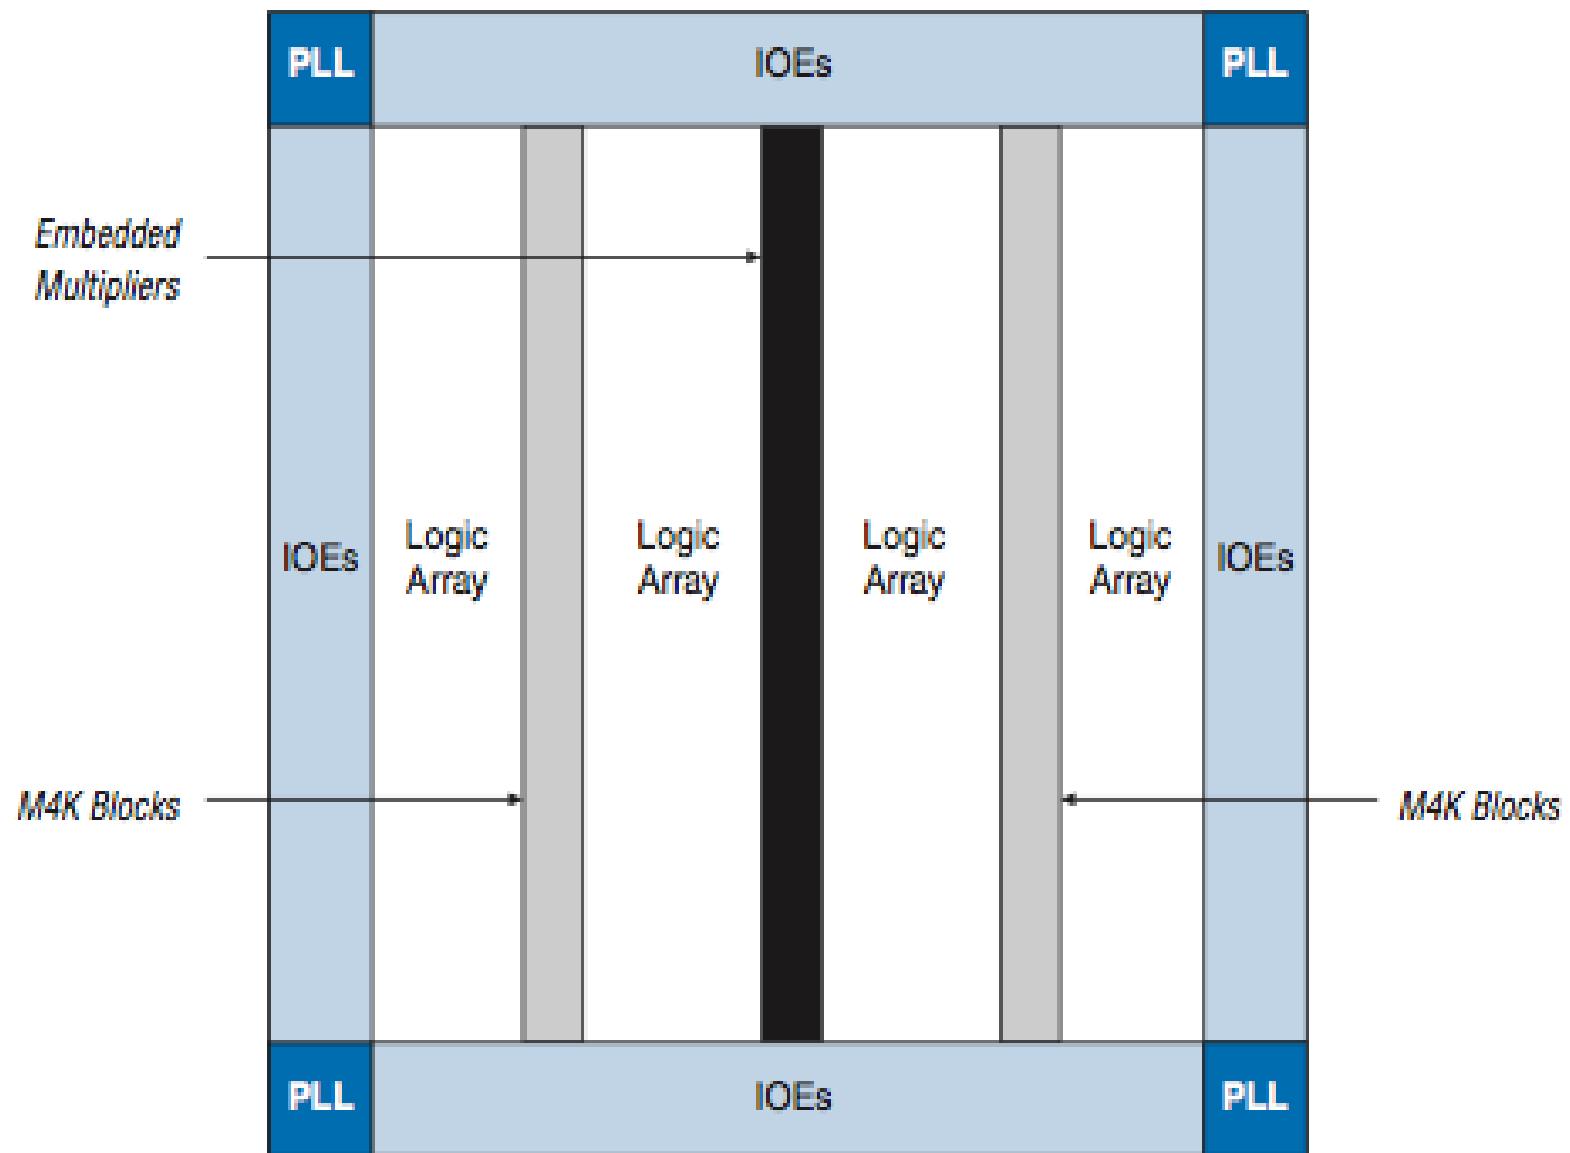


Figure 2–2. Cyclone II LE

